

INSTALLATION MANUAL

Burner Media

For installation in
50-DVTE36CN-1 & 62-DVTE46CN-1
 (see the Installation, Operation, and Maintenance Manual
 included with the fireplace)



After removing the parts from packaging, inspect them to ensure that no damage has occurred. Please report any damage immediately to your authorized Archgard dealer.

IMPORTANT

Please review and understand the information in this manual in full PRIOR to beginning your installation.

WARNING: If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury or loss of life.

Do not store or use gasoline or other flammable vapors or liquids in the vicinity of this or any other appliance.

WHAT TO DO IF YOU SMELL GAS:

- Do not try to light any appliance
- Do not touch any electrical switch; do not use any phone in your building
- Immediately call your gas supplier from a neighbors phone.
- Follow the gas suppliers instructions
- If you can not reach your gas supplier, call the fire department

Installation and service must be performed by a qualified installer, service agency or the gas supplier.

Only kits supplied by the manufacturer may be used.

English and French Installation Manuals available through your local dealer or visit our website at:

www.archgard.com

Les manuels d'installation en anglais et en français son disponibles chez votre détaillant local ou en visitant notre site web: **www.archgard.com**

INSTALLER:

LEAVE THIS MANUAL WITH THE APPLIANCE.

CONSUMER:

RETAIN THIS MANUAL FOR FUTURE REFERENCE.

ARCHGARD FIREPLACE PRODUCTS

300 Railway Avenue
 Raymond, AB T0K 2S0 Canada

1.0 Important Information	3
2.0 Burner Media	4
2.1 Fire Beads.....	4
2.2 Black Embers.....	5
2.3 River Rocks.....	6
3.0 Silhouette Log Set	7
4.0 Premium Log Sets	8
4.1 Overview of Log Sets.....	8
4.2 Installing Log Set A Only: 50-DVTE36CN-1.....	11
4.3 Installing Log Set A Only: 62-DVTE46CN-1.....	15
4.4 Installing Both Log Sets: 50-DVTE36CN-1 & 62-DVTE46CN-1.....	19

1.0 Important Information

WARNING

Failure to position the burner media in accordance with the this manual, or failure to use only parts specifically approved with this appliance, may result in property damage or personal injury. Never use unapproved burner media such as rock wool or similar material. The use of unapproved burner media may cause damage or injury and will void product warranty.

IMPORTANT

When placing burner media around the pilot shield take care to not block the pilot opening. Failure to keep the opening clear of media will cause a delayed ignition. Media should also be placed so they do not completely block burner ports. **DO NOT** block secondary air gaps at the sides of the burner.

Note: The following information applies for all media installation options.

Gas and vent connection must be made before installing burner media.

Before you begin:

- Ensure the fireplace is OFF and cool before servicing the fireplace
- Ensure the gas supply is turned OFF and disconnect the power supply (including backup batteries)
- Remove barrier screen or decorative front*
- Remove the valve blind (recommended)*
- Remove glass door*

* See the Installation, Operation, and Maintenance Manual included with the fireplace.

CAUTION: DO NOT block pilot opening with burner media.

NOTE: Improper placement of burner media may cause soot accumulation on the internal parts and glass. This is not covered under warranty. Do not use damaged media.

The Kōjin 50 and Kōjin 62 offer dozens of potential media installation combination options. Burner media may be mixed, and silhouette logs may be placed in almost any configuration or used with any media type.

There are only few common restrictions:

1. The secondary air channels on the left and right side of the burner may not be blocked (see **Figure 1.0.01**).
2. The pilot opening must not be blocked (see **Figure 1.0.02**).
3. If placing Silhouette logs, they should not be placed directly on the burner ports - use the logs to bridge the burner instead (see **Section 3.0**).
4. The Grand Timber and Silver Birch log sets must be installed as shown (see **Section 4**).
5. Only use approved burner media.

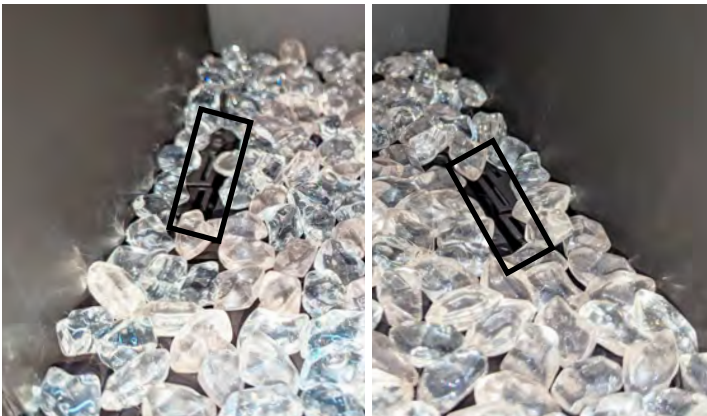


Figure 1.0.01: Secondary Air Openings

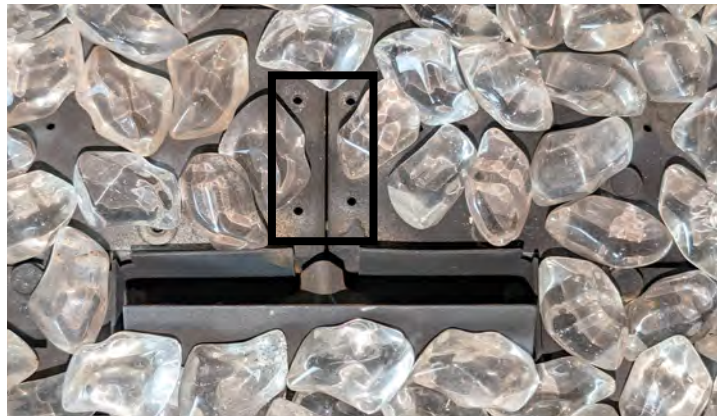


Figure 1.0.02: Do not block pilot

Installation

2.0 Burner Media

2.1 Fire Beads

Gas and vent connection must be made before installing burner media.

CAUTION: DO NOT block pilot opening with burner media.

NOTE: Improper placement of burner media may cause soot accumulation on the internal parts and glass. This is not covered under warranty. Do not use damaged media.

The following images show installation of Clear White Fire Beads. The installation steps are the same no matter which fire bead option is being installed.

Place the burner media over the the entire burner in a single, staggered layer. Do not block the air openings in the ends of the burner as shown in **Figure 2.1.01** and **Figure 2.1.02**. To cover the pilot shield, place an extra layer along the front of the pilot shield as shown in **Figure 2.1.03**.

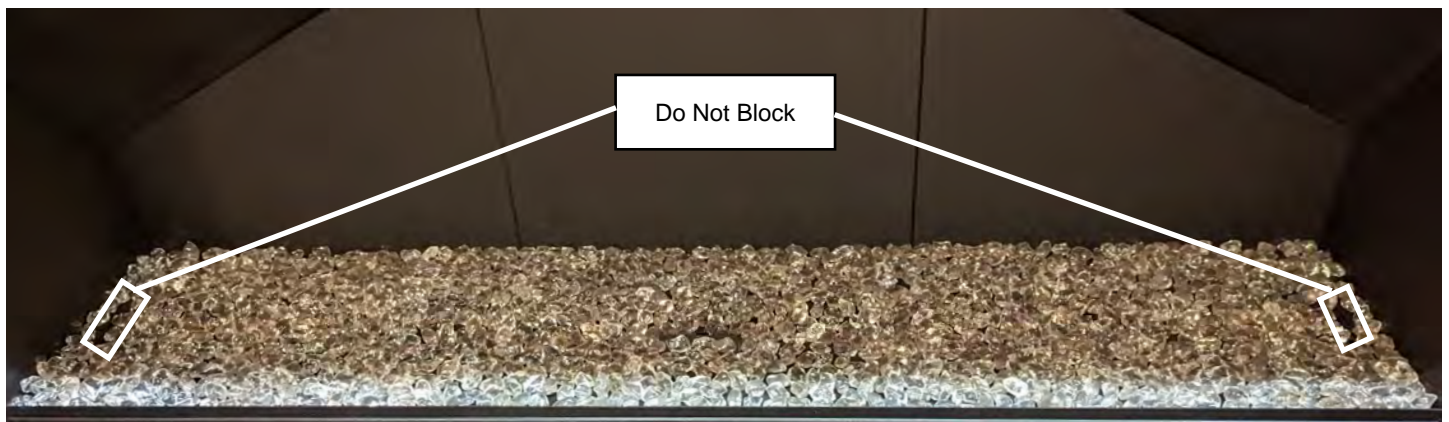


Figure 2.1.01:



Figure 2.1.02: Secondary Air Openings



Figure 2.1.03: Covering the Pilot Shield

Fire Beads come in 35 oz bags.

Kit Part Number	Description	Quantity of bags per 50-DVTE36CN-1	Quantity of bags per 62-DVTE46CN-1
999-FB-CW35	Clear White Fire Beads	5 bags	6 bags
999-FB-JB35	Jet Black Fire Beads	4 bags	5 bags
999-FB-A35	Amber Fire Beads	4 bags	5 bags

Installation

2.2 Black Embers

Gas and vent connection must be made before installing burner media.

CAUTION: DO NOT block pilot opening with burner media.

NOTE: Improper placement of burner media may cause soot accumulation on the internal parts and glass. This is not covered under warranty. Do not use damaged media.

Place the burner media over the the entire burner in a single, staggered layer. Do not block the air openings in the ends of the burner as shown in **Figure 2.2.01** and **Figure 2.2.02**. To cover the pilot shield, place an extra layer along the front of the pilot shield as shown in **Figure 2.2.03**.

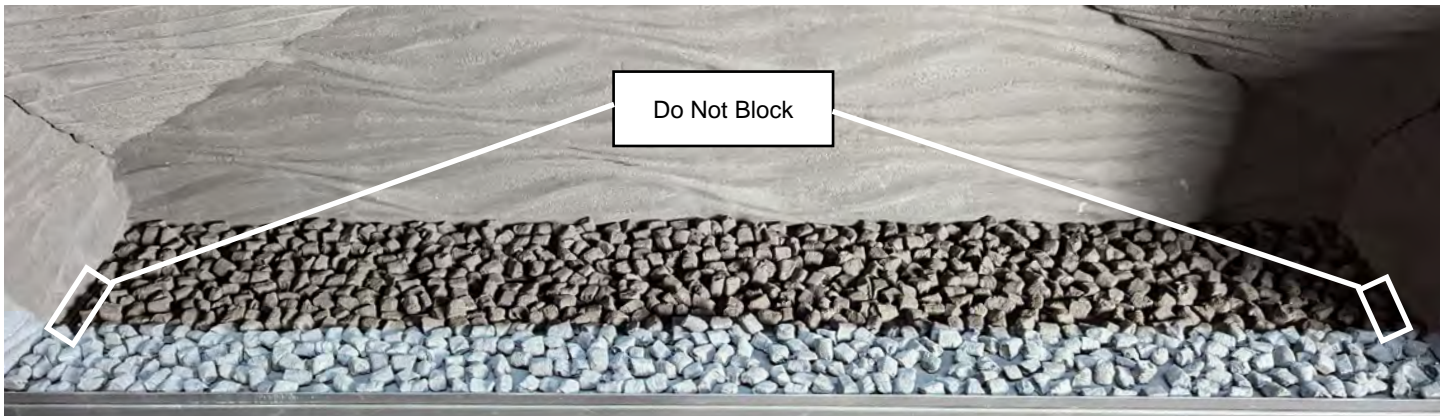


Figure 2.2.01:



Figure 2.2.02: Secondary Air Openings



Figure 2.2.03: Covering the Pilot Shield

Black Embers come in 2 cup bags.

Kit Part Number	Description	Quantity of bags per 50-DVTE36CN-1	Quantity of bags per 62-DVTE46CN-1
310-0020	Black Embers (2 cup bag)	9 bags	11

Installation

2.3 River Rocks

The following images show installation of Mississippi River Rocks. The installation steps are the same for the Santa Cruz River Rocks.

Before installing the rocks, place the Jet Black Fire Beads along the burner.



Figure 2.3.01:

Starting with the larger rocks, place the rocks over the the entire burner in a single, staggered layer. Go back to fill in spaces with the medium sized stones. Repeat for the smallest size. Do not block the air openings in the ends of the burner as shown in **Figure 2.3.02** and **Figure 2.3.03**.

Note: Rocks may need to be adjusted to avoid excessive sooting. Do not block burner ports with flat sides of rocks.

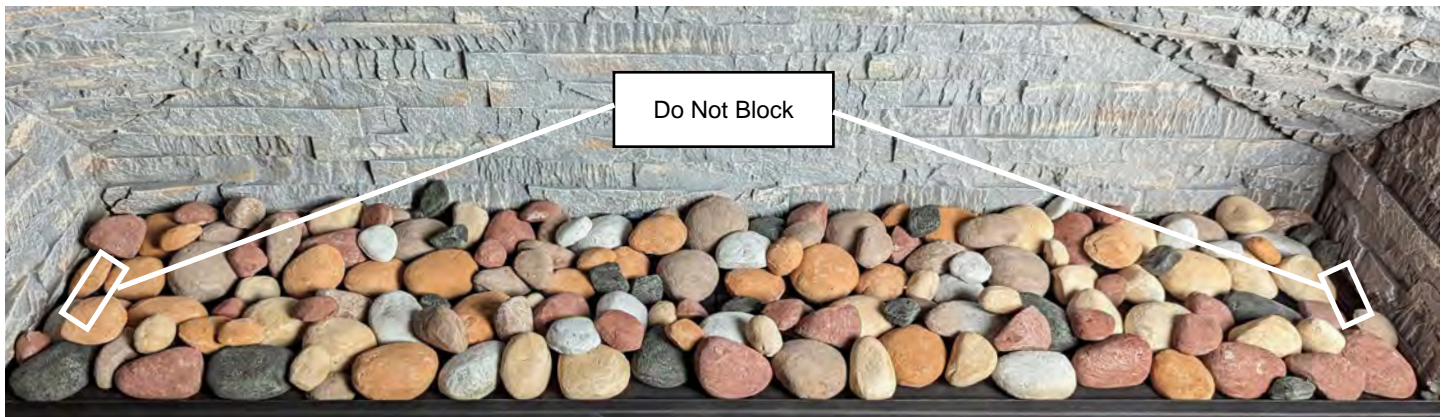


Figure 2.3.02:

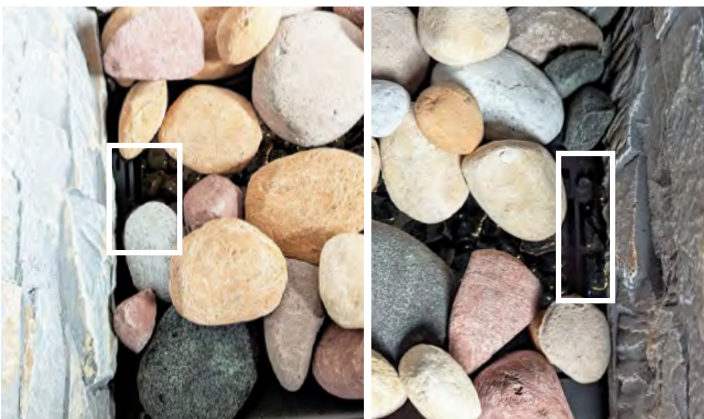


Figure 2.3.03: Secondary Air Openings

River Rock Set Part Numbers:

Kit Part Number	Description	Quantity of kits per Fireplace
31-RR	Mississippi River Rocks	2
31-RRG	Santa Cruz River Rocks	2
999-FB-JB35	Jet Black Fire Beads	1 bag

Note: A mixture of river rock kits may be used to create a greater variety in stone colors. Install one of each kit in the color pattern of your choosing.

Installation

3.0 Silhouette Log Set

Silhouette Log Sets may be used to customize the look of your burner media. The logs are available in white, black, and grey. Each set includes two (2) logs.

- A maximum of 14 logs (7 sets) may be installed in any color combination in the 50-DVTE36CN-1.
- A maximum of 18 logs (9 sets) may be installed in any color combination in the 62-DVTE46CN-1.
- As little as one log may be installed (in either model) if desired.

Care must be given when handling the logs as they can be damaged or broken if not handled properly. After opening the log set package, inspect the logs to ensure that no damage has occurred inside the package. Please report any damage immediately to your authorized Archgard dealer. Do not use broken or damaged logs.

Install glass media, black embers, or river rocks prior to placing Silhouette Logs.

Note: Logs may need to be adjusted to avoid excessive sooting.

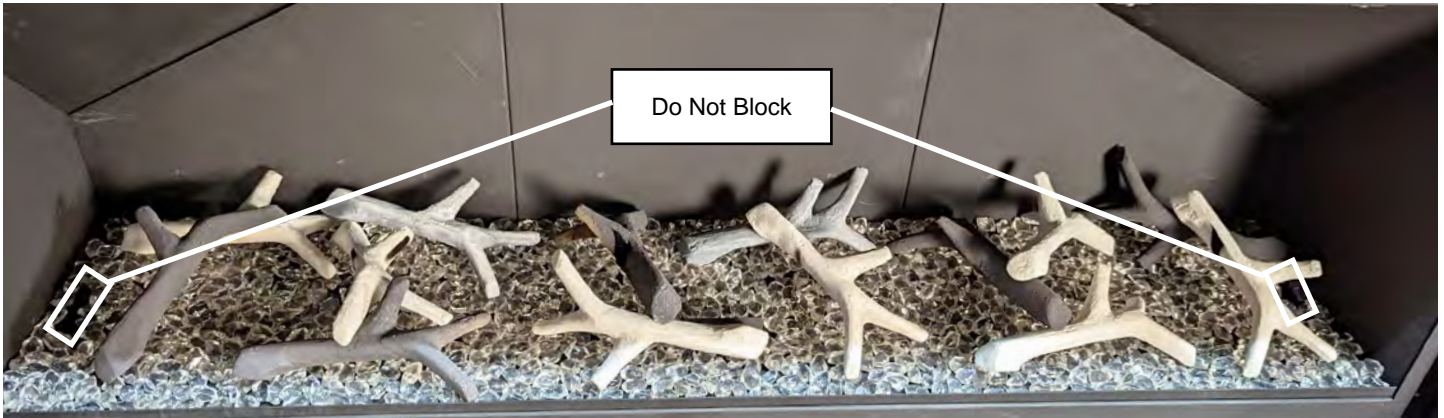


Figure 3.0.01:

Randomly place the logs as desired. The logs may cross the flame, however, they should be placed in a way that they bridge the burner. Do not block burner ports with the logs.



Figure 3.0.02: Use logs to bridge the burner.

Silhouette Log Set Part Numbers		
Kit Part Number	Description	Quantity of logs per kit
2-LS-SW	White Silhouette Log Set	2
2-LS-SG	Grey Silhouette Log Set	2
2-LS-SB	Black Silhouette Log Set	2

Burner Media Options When Using Silhouette Logs			
Part #	Item Description	Qty, Kōjin 50	Qty, Kōjin 62
31-RR	Mississippi River Rocks	2 Kits	2 Kits
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag	1 Bag
31-RR-G	Santa Cruz River Rocks	2 Kits	2 Kits
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag	1 Bag
999-FB-CW35	Clear White Fire Beads	5 Bags	6 Bags
999-FB-JB35	Jet Black Fire Beads	4 Bags	5 Bags
999-FB-A35	Amber Fire Beads	4 Bags	5 Bags
310-0020	Black Embers (2 cup bag)	9 Bags	11 Bags

4.0 Premium Log Sets

The following instructions show the installation process of the Grand Timber and Silver Birch Log Sets with Black Embers. You may install Log Set A alone or install Log Set A and Log Set B to achieve a denser fire package.

- **Section 4.2** shows the installation process for Log Set A alone in the 50-DVTE36CN-1.
- **Section 4.3** shows the installation process for Log Set A alone in the 62-DVTE46CN-1.
- **Section 4.4** shows the installation process for both Log Set A and Log Set B.

Premium log sets must be placed in the orientation shown. They cannot be placed randomly.

4.1 Overview of Log Sets

Grand Timber Log Set A

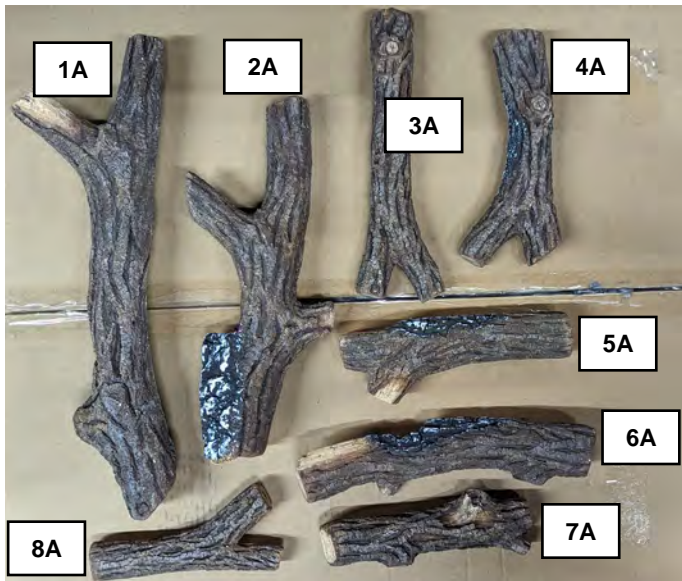


Figure 4.1.01: 999-LS-GTA

Grand Timber Log Set B



Figure 4.1.02: 999-LS-GTB

Silver Birch Log Set A

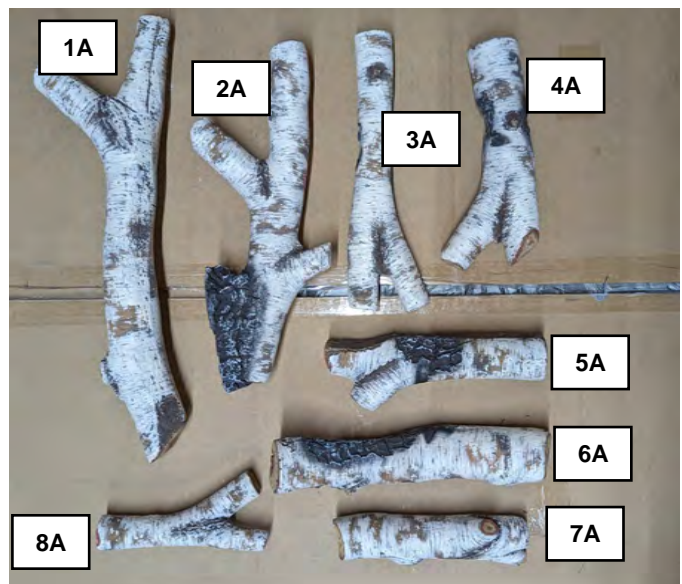


Figure 4.1.03: 999-LS-SBA

Silver Birch Log Set B



Figure 4.1.04: 999-LS-SBB

Installation

Kōjin 50



Figure 4.1.05: 999-LS-GTA only



Figure 4.1.06: 999-LS-GTA and 999-LS-GTB



Figure 4.1.07: 999-LS-SBA only



Figure 4.1.08: 999-LS-SBA and 999-LS-GTB

Installation

Kōjin 62



Figure 4.1.09: 999-LS-GTA only



Figure 4.1.10: 999-LS-GTA and 999-LS-GTB



Figure 4.1.11: 999-LS-SBA only



Figure 4.1.12: 999-LS-SBA and 999-LS-GTB

Installation

4.2 Installing Log Set A Only: 50-DVTE36CN-1

Installing Log Set A alone provides the traditional look with fewer logs for those who prefer a fire that is less dense. The following instructions show the installation of the Silver Birch Log Set with Black Embers. The process is the same if installing the Grand Timber Log Set or if using a fire bead option. The premium log sets may be installed with River Rocks, however, we recommend only using the small and medium sized rocks.

Log Set A must be placed in the orientation shown. The logs cannot be placed randomly.

Take care when handling the logs as they can be damaged or broken if not handled properly.

After opening the log set package, inspect the logs to ensure that no damage has occurred inside the package. Please report any damage immediately to your Authorized Archgard Dealer.

NOTE: Improper placement of logs and embers may cause soot accumulation on the internal parts and glass. This is not covered under warranty. Do not use broken or damaged logs.

IMPORTANT: Embers should be placed so as not to completely block burner ports.

Step 1: Place media along the burners. Do not place media on the burner surround yet.



Figure 4.2.01:

Note: Do not block the secondary air openings at each end of the burner.



Figure 4.2.02:



Figure 4.2.03:

WARNING

Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.

Installation

Step 2: Place Log 1A in the left, rear corner of the firebox as shown.



Figure 4.2.04:

Step 3: Place Log 2A in the right, rear corner of the firebox.

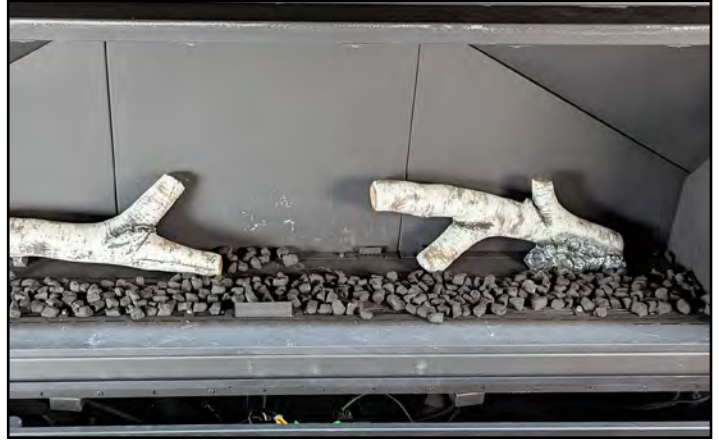


Figure 4.2.05:

Step 4: Place Log 3A with the forked end resting on Log 1A and the other end at the front of the burner surround.



Figure 4.2.06:

Step 5: Rest Log 4A on the end of Log 1A. Cross the burner with the front of the log in front of the burner.



Figure 4.2.07:

Step 6: Place Log 5A along the front of the burner on the left side.



Figure 4.2.08:

Step 7: Rest the end of Log 6A on top of Log 4A with the front in front of the burner.



Figure 4.2.09:

Installation

Step 8: Place Log 7A along the front of the burner on the left side.



Figure 4.2.10:

Step 9: Rest the end of Log 8A with the back on the edge of the burner and the front on the front edge of the burner surround.



Figure 4.2.11:



Figure 4.2.12: Log 08A Detail

Step 10: Spread Black Embers along the burner surround and logs in an even layer. Do not block the secondary air openings as shown in Figure 4.2.02 and Figure 4.2.03.



Figure 4.2.13:

Installation

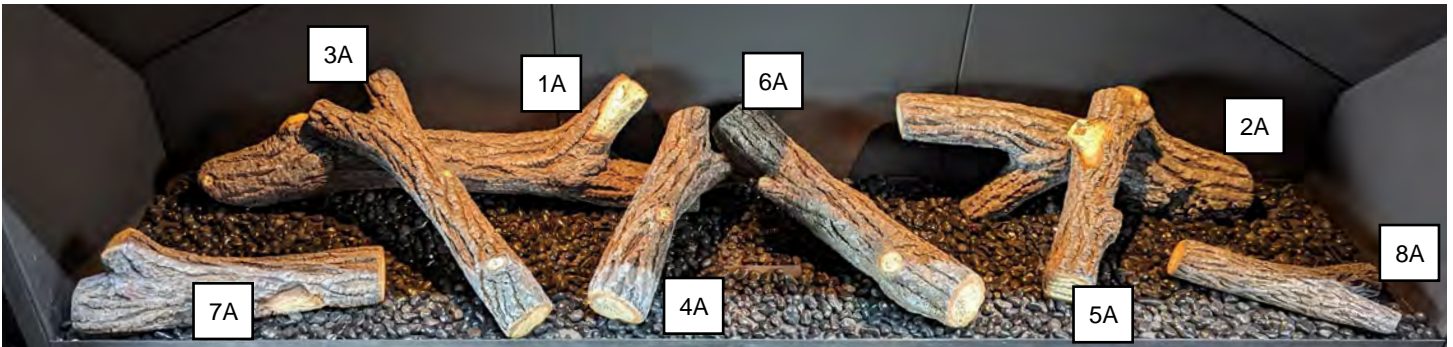


Figure 4.2.14:

Grand Timber Log Set A Part Numbers	
Part #	Description
999-LS-GTA	Log Set A
999-LS-GTA-1	Log 1A
999-LS-GTA-2	Log 2A
999-LS-GTA-3	Log 3A
999-LS-GTA-4	Log 4A
999-LS-GTA-5	Log 5A
999-LS-GTA-6	Log 6A
999-LS-GTA-7	Log 7A
999-LS-GTA-8	Log 8A

Burner Media Options When Using Set A ONLY		
Part #	Description	Qty 50-DVTE36CN-1
31-RR	Mississippi River Rocks	1 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
31-RR-G	Santa Cruz River Rocks	1 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
999-FB-CW35	Clear White Fire Beads	4 Bags
999-FB-JB35	Jet Black Fire Beads	3 Bags
999-FB-A35	Amber Fire Beads	3 Bags
310-0020	Black Embers (2 cup bag)	6 Bags

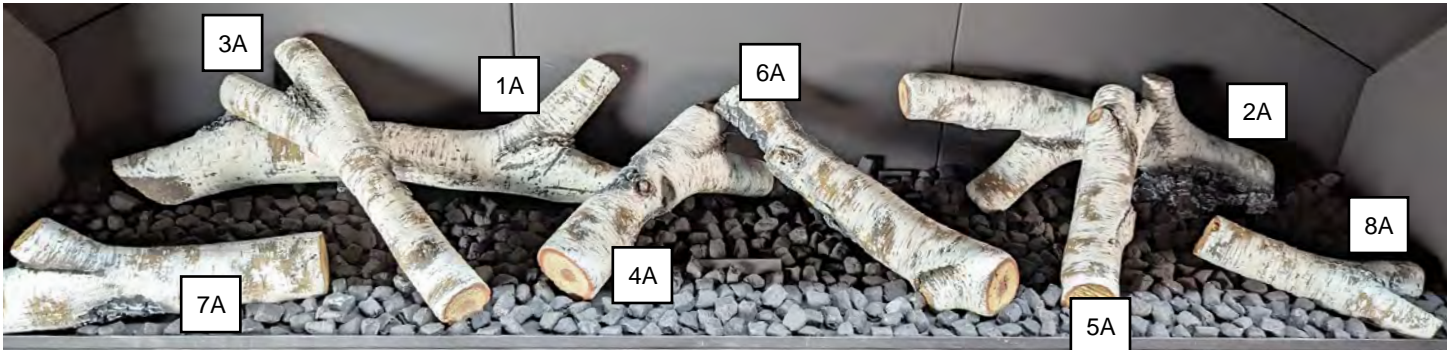


Figure 4.2.15:

Silver Birch Log Set A Part Numbers	
Part #	Description
999-LS-SBA	Log Set A
999-LS-SBA-1	Log 1A
999-LS-SBA-2	Log 2A
999-LS-SBA-3	Log 3A
999-LS-SBA-4	Log 4A
999-LS-SBA-5	Log 5A
999-LS-SBA-6	Log 6A
999-LS-SBA-7	Log 7A
999-LS-SBA-8	Log 8A

Burner Media Options When Using Set A ONLY		
Part #	Description	Qty 50-DVTE36CN-1
31-RR	Mississippi River Rocks	1 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
31-RR-G	Santa Cruz River Rocks	1 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
999-FB-CW35	Clear White Fire Beads	4 Bags
999-FB-JB35	Jet Black Fire Beads	3 Bags
999-FB-A35	Amber Fire Beads	3 Bags
310-0020	Black Embers (2 cup bag)	6 Bags

Installation

4.3 Installing Log Set A Only: 62-DVTE46CN-1

Installing Log Set A alone provides the traditional look with fewer logs for those who prefer a fire that is less dense. The following instructions show the installation of the Grand Timber Log Set with Black Embers. The process is the same if installing the Silver Birch Log Set or if using a Fire Bead option. The premium log sets may be installed with River Rocks, however, we recommend only using the small and medium sized rocks.

Log Set A must be placed in the orientation shown. The logs cannot be placed randomly.

Take care when handling the logs as they can be damaged or broken if not handled properly.

After opening the log set package, inspect the logs to ensure that no damage has occurred inside the package. Please report any damage immediately to your Authorized Archgard Dealer.

NOTE: Improper placement of logs and embers may cause soot accumulation on the internal parts and glass. This is not covered under warranty. Do not use broken or damaged logs.

IMPORTANT: Embers should be placed so as not to completely block burner ports.

Step 1: Place media along the burners. Do not place media on the burner surround yet.



Figure 4.3.01:

Note: Do not block the secondary air openings at each end of the burner.



Figure 4.3.02:



Figure 4.3.03:

WARNING

Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.

Installation

Step 2: Place Log 3A in the left, rear corner of the firebox as shown.



Figure 4.3.04:

Step 3: Place Log 1A in the middle of the firebox, bridging the burner as shown.



Figure 4.3.05:

Step 4: Place Log 5A in the right side of the firebox. Do not block the burner ports.



Figure 4.3.06:

Step 5: Place the back of Log 2A on the right side of 3A. The front edge should rest on the front edge of the burner surround, bridging the burner.



Figure 4.3.07:

Note: Log 2A Should be placed with the embers facing toward the back of the fireplace.



Figure 4.3.08:

Step 6: Place the back of Log 4A on the right side of 1A. The front edge should rest on the front edge of the burner surround, bridging the burner.



Figure 4.3.09:

Installation

Step 7: Place the front of Log 7A on the middle of 5A. The back edge should rest in the right, rear corner of the firebox, bridging the burner.



Figure 4.3.10:



Figure 4.3.11: Detail view

Step 8: Place the back of Log 8A on the right side of 3A. The front edge should rest on the front edge of the burner surround, bridging the burner.



Figure 4.3.12:

Step 9: Place the front of Log 6A on the middle of Log 1A. The back edge should rest in the left, rear corner of the firebox, bridging the burner.



Figure 4.3.13:



Figure 4.3.14:

Installation

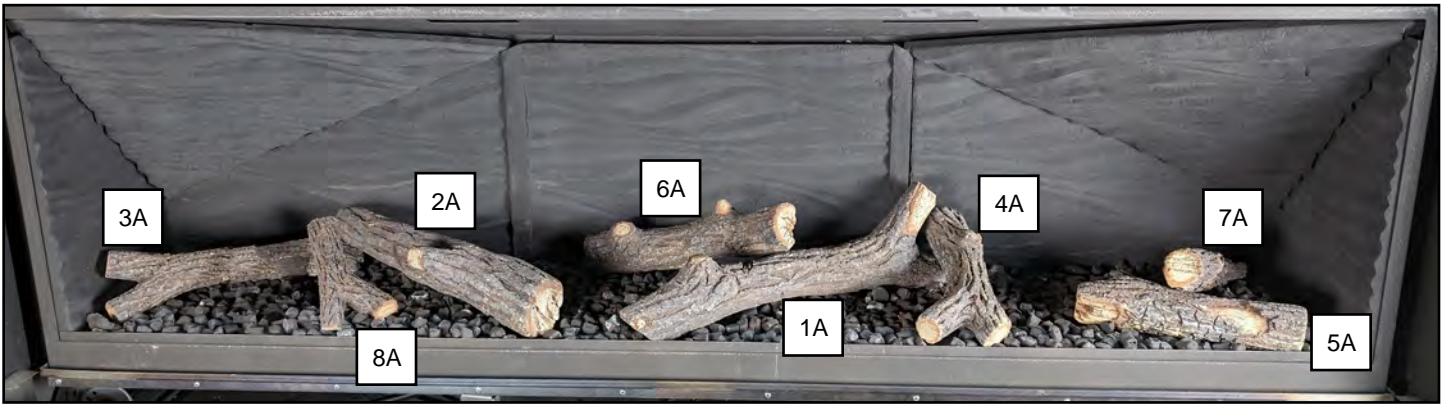


Figure 4.3.15:

Grand Timber Log Set A Part Numbers	
Part #	Description
999-LS-GTA	Log Set A
999-LS-GTA-1	Log 1A
999-LS-GTA-2	Log 2A
999-LS-GTA-3	Log 3A
999-LS-GTA-4	Log 4A
999-LS-GTA-5	Log 5A
999-LS-GTA-6	Log 6A
999-LS-GTA-7	Log 7A
999-LS-GTA-8	Log 8A

Burner Media Options When Using Set A ONLY		
Part #	Description	Qty
31-RR	Mississippi River Rocks	2 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
31-RR-G	Santa Cruz River Rocks	2 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
999-FB-CW35	Clear White Fire Beads	5 Bags
999-FB-JB35	Jet Black Fire Beads	4 Bags
999-FB-A35	Amber Fire Beads	4 Bags
310-0020	Black Embers (2 cup bag)	8 Bags

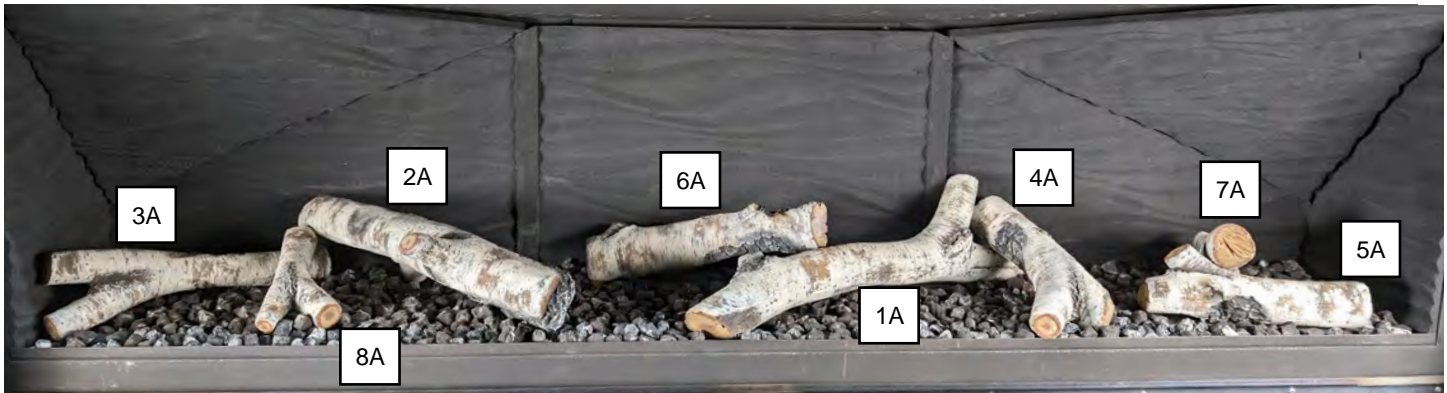


Figure 4.3.16:

Silver Birch Log Set A Part Numbers	
Part #	Description
999-LS-SBA	Log Set A
999-LS-SBA-1	Log 1A
999-LS-SBA-2	Log 2A
999-LS-SBA-3	Log 3A
999-LS-SBA-4	Log 4A
999-LS-SBA-5	Log 5A
999-LS-SBA-6	Log 6A
999-LS-SBA-7	Log 7A
999-LS-SBA-8	Log 8A

Burner Media Options When Using Set A ONLY		
Part #	Description	Qty
31-RR	Mississippi River Rocks	2 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
31-RR-G	Santa Cruz River Rocks	2 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
999-FB-CW35	Clear White Fire Beads	5 Bags
999-FB-JB35	Jet Black Fire Beads	4 Bags
999-FB-A35	Amber Fire Beads	4 Bags
310-0020	Black Embers (2 cup bag)	8 Bags

Installation

4.4 Installing Both Log Sets: 50-DVTE36CN-1 & 62-DVTE46CN-1

Installing both log sets provides a fuller fireplace than installing Log Set A alone. The following instructions show the installation of the Grand Timber Log Set with Black Embers. The process is the same if installing the Silver Birch Log Set or if using a Glass Bead option. The premium log sets may be installed with River Rocks, however, we recommend only using the small and medium sized rocks.

Premium log sets must be placed in the orientation shown regardless of which model you have, however, the spacing will differ if installing in the Kōjin 62 (see **Figure 4.4.27** through **Figure 4.4.30**). The logs cannot be placed randomly.

Take care when handling the logs as they can be damaged or broken if not handled properly.

After opening the log set package, inspect the logs to ensure that no damage has occurred inside the package. Please report any damage immediately to your Authorized Archgard Dealer.

NOTE: Improper placement of logs and embers may cause soot accumulation on the internal parts and glass. This is not covered under warranty. Do not use broken or damaged logs.

IMPORTANT: Embers should be placed so as not to completely block burner ports.

Step 1: Place media along the burners. Do not place media on the burner surround yet.



Figure 4.4.01:

Note: Do not block the secondary air openings at each end of the burner.



Figure 4.4.02:



Figure 4.4.03:

WARNING

Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.

Installation

Step 2: Place Log 1A in the right, rear corner of the firebox as shown.



Figure 4.4.04:

Step 3: Place Log 1B in the left, rear corner of the firebox.



Figure 4.4.05:



Figure 4.4.06: Logs 1A and 1B in place.

Step 4: Place Log 2A in the middle.



Figure 4.4.07:

Installation

Step 5: Log 2B spans the burner with the back end between Log 1B and Log 2A.



Figure 4.4.08:



Figure 4.4.09:

Step 6: Place Log 3A as shown with the single end on top of Log 1A and the split end in front of the burner.



Figure 4.4.10:



Figure 4.4.11:

Step 7: Log 3B rests on Log 1B with the front edge toward the front of the burner.



Figure 4.4.12:

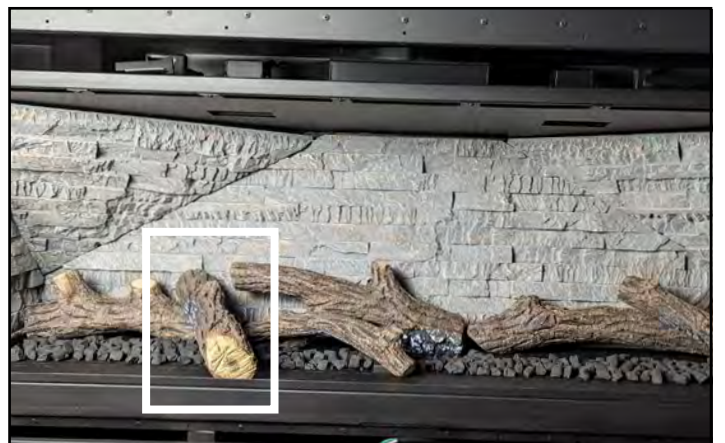


Figure 4.4.13:

Installation

Step 8: Place Log 4A on Log 1A with the branched end toward the front of the burner.



Figure 4.4.14:

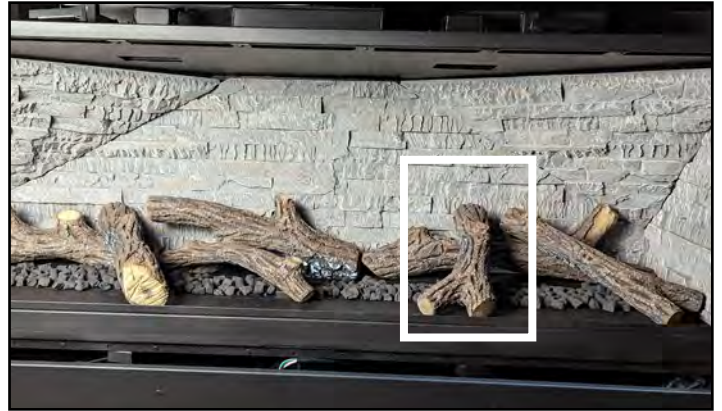


Figure 4.4.15:

Step 9: Place Log 4B toward the front of the burner with the longer branch resting on Log 3A.



Figure 4.4.16:



Figure 4.4.17:

Step 10: Place the back of Log 5A where Log 1A and Log 2A meet. The front of the log aligns toward the front of the burner.



Figure 4.4.18:



Figure 4.4.19:

Installation

Step 11: Place Log 6A with the back on top of Log 1B and the front aligned at the front of the burner.



Figure 4.4.20:



Figure 4.4.21:

Step 12: Place Log 7A with one end on Log 6 and the split end aligned toward the front of the burner.



Figure 4.4.22:



Figure 4.4.23:

Step 13: Place the split end of Log 8A on top of Log 2B with the front edge aligned at the front of the burner.



Figure 4.4.24:



Figure 4.4.25:

Installation

Step 14: Spread Black Embers along the burner surround and logs in an even layer. Do not block the secondary air openings as shown in **Figure 4.4.02** and **Figure 4.4.03**.



Figure 4.4.26:

Installation

Overview - Both Log Sets: 50-DVTE36CN-1



Figure 4.4.27:

Grand Timber Log Set Part Numbers			
Part #	Description	Part #	Description
999-LS-GTA	Log Set A	999-LS-GTB	Log Set B
999-LS-GTA-1	Log 1A	999-LS-GTB-1	Log 1B
999-LS-GTA-2	Log 2A	999-LS-GTB-2	Log 2B
999-LS-GTA-3	Log 3A	999-LS-GTB-3	Log 3B
999-LS-GTA-4	Log 4A	999-LS-GTB-4	Log 4B
999-LS-GTA-5	Log 5A		
999-LS-GTA-6	Log 6A		
999-LS-GTA-7	Log 7A		
999-LS-GTA-8	Log 8A		

Burner Media Options When Using Set A & Set B		
Part #	Description	Qty
31-RR	Mississippi River Rocks	1 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
31-RR-G	Santa Cruz River Rocks	1 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
999-FB-CW35	Clear White Fire Beads	3 Bags
999-FB-JB35	Jet Black Fire Beads	3 Bags
999-FB-A35	Amber Fire Beads	3 Bags
310-0020	Black Embers (2 cup bag)	5 Bags

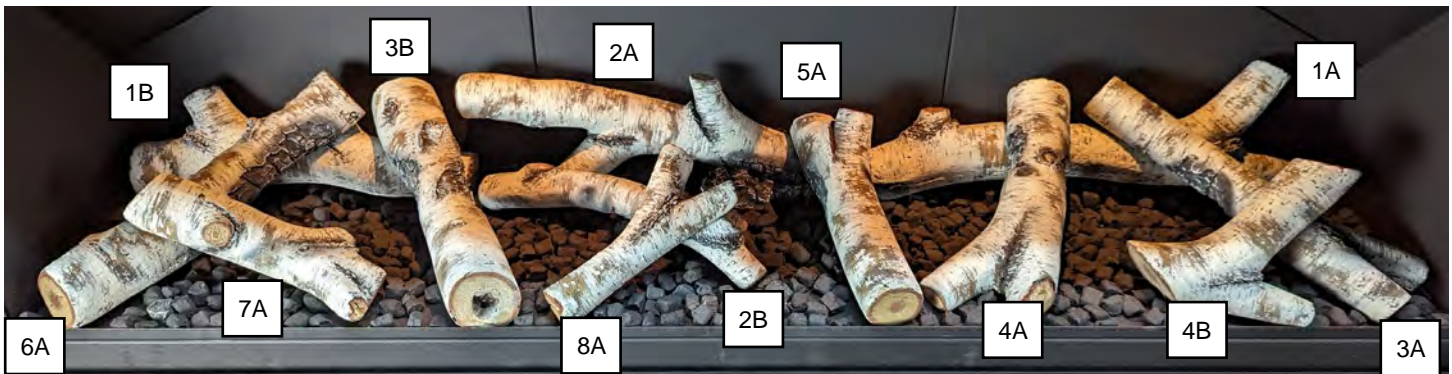


Figure 4.4.28:

Silver Birch Log Set Part Numbers			
Part #	Description	Part #	Description
999-LS-SBA	Log Set A	999-LS-SBB	Log Set B
999-LS-SBA-1	Log 1A	999-LS-SBB-1	Log 1B
999-LS-SBA-2	Log 2A	999-LS-SBB-2	Log 2B
999-LS-SBA-3	Log 3A	999-LS-SBB-3	Log 3B
999-LS-SBA-4	Log 4A	999-LS-SBB-4	Log 4B
999-LS-SBA-5	Log 5A		
999-LS-SBA-6	Log 6A		
999-LS-SBA-7	Log 7A		
999-LS-SBA-8	Log 8A		

Burner Media Options When Using Set A & Set B		
Part #	Description	Qty
31-RR	Mississippi River Rocks	1 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
31-RR-G	Santa Cruz River Rocks	1 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
999-FB-CW35	Clear White Fire Beads	3 Bags
999-FB-JB35	Jet Black Fire Beads	3 Bags
999-FB-A35	Amber Fire Beads	3 Bags
310-0020	Black Embers (2 cup bag)	5 Bags

Installation

Overview - Both Log Sets: 62-DVTE46CN-1



Figure 4.4.29:

Grand Timber Log Set Part Numbers			
Part #	Description	Part #	Description
999-LS-GTA	Log Set A	999-LS-GTB	Log Set B
999-LS-GTA-1	Log 1A	999-LS-GTB-1	Log 1B
999-LS-GTA-2	Log 2A	999-LS-GTB-2	Log 2B
999-LS-GTA-3	Log 3A	999-LS-GTB-3	Log 3B
999-LS-GTA-4	Log 4A	999-LS-GTB-4	Log 4B
999-LS-GTA-5	Log 5A		
999-LS-GTA-6	Log 6A		
999-LS-GTA-7	Log 7A		
999-LS-GTA-8	Log 8A		

Burner Media Options When Using Set A & Set B		
Part #	Description	Qty
31-RR	Mississippi River Rocks	2 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
31-RR-G	Santa Cruz River Rocks	2 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
999-FB-CW35	Clear White Fire Beads	4 Bags
999-FB-JB35	Jet Black Fire Beads	4 Bags
999-FB-A35	Amber Fire Beads	4 Bags
310-0020	Black Embers (2 cup bag)	7 Bags

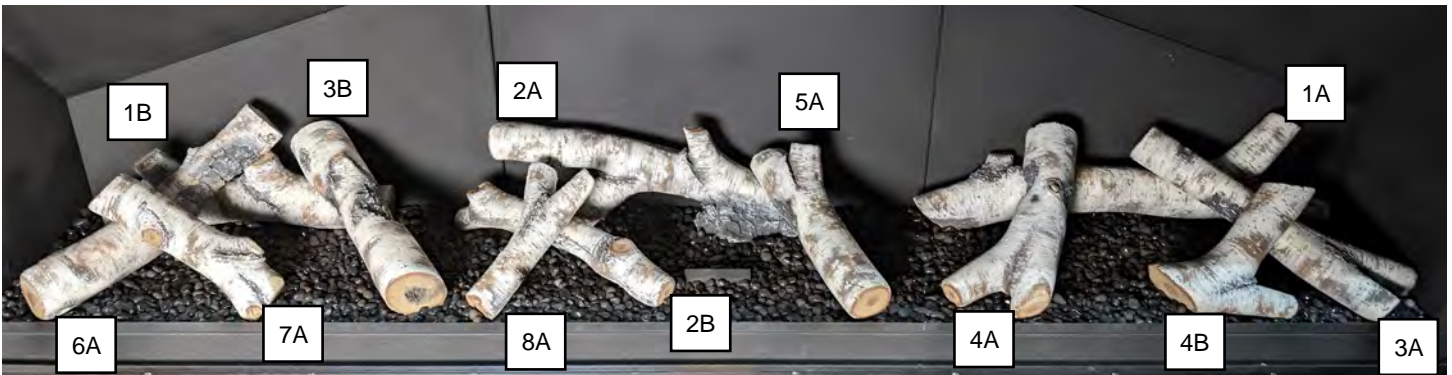


Figure 4.4.30:

Silver Birch Log Set Part Numbers			
Part #	Description	Part #	Description
999-LS-SBA	Log Set A	999-LS-SBB	Log Set B
999-LS-SBA-1	Log 1A	999-LS-SBB-1	Log 1B
999-LS-SBA-2	Log 2A	999-LS-SBB-2	Log 2B
999-LS-SBA-3	Log 3A	999-LS-SBB-3	Log 3B
999-LS-SBA-4	Log 4A	999-LS-SBB-4	Log 4B
999-LS-SBA-5	Log 5A		
999-LS-SBA-6	Log 6A		
999-LS-SBA-7	Log 7A		
999-LS-SBA-8	Log 8A		

Burner Media Options When Using Set A & Set B		
Part #	Description	Qty
31-RR	Mississippi River Rocks	2 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
31-RR-G	Santa Cruz River Rocks	2 Kit
+ 999-FB-JB35	Jet Black Fire Beads	1 Bag
999-FB-CW35	Clear White Fire Beads	4 Bags
999-FB-JB35	Jet Black Fire Beads	4 Bags
999-FB-A35	Amber Fire Beads	4 Bags
310-0020	Black Embers (2 cup bag)	7 Bags

ARCHGARD INDUSTRIES LTD.

300 RAILWAY AVENUE
RAYMOND, AB T0K 2S0
CANADA

WWW.ARCHGARD.COM